



This report complies with the accreditation requirements of Cgcre/Inmetro, the Brazilian national institute for industrial quality that evaluated the laboratory performance.



Test Report PD.33.GS.E1A.3313A/RE-06-AA

Electromagnetic Compatibility Tests on Low-Voltage Temperature Sensor with Cable Communication

Model: ZSB/M/60/120

Manufacturer: Varixx

Quotation: 28808/11 SO: 64746

Customer: Varixx Indústria Eletrônica Ltda
Contact: Leonardo Lopes
Address: Rua Phellippe Zaidan Maluf, 450
13422-190 - Piracicaba/SP-Brazil

Email: leonardo@varixx.com.br

Phone: +55 19 3301-6900

Fax: +55 19 3424-4001

Table of Contents

1	Scope.....	4
2	Identification of Equipment Under Test.....	4
2.1	Changes made to the sample during tests.....	5
3	General Information.....	5
4	Technical Documentation Provided.....	5
5	Test Methods and References.....	6
6	Test Laboratory.....	6
7	Summary of the Tests Performed.....	7
8	Terminology.....	7
9	EUT Operating Conditions.....	7
10	Radiated Emission.....	9
10.1	Instruments Used.....	9
10.2	Test Procedure.....	9
10.3	Environmental Conditions.....	9
10.4	Results.....	10
10.4.1	Measurement Uncertainty.....	12
10.5	Photos of the Test Assembly.....	13
11	Conducted Emission in Electric Power Terminals	13
11.1	Instruments Used.....	13
11.2	Test Procedure.....	13
11.3	Environmental Conditions.....	14
11.4	Results.....	14
11.4.1	Measurement Uncertainty.....	15
11.5	Photos of the Test Assembly.....	16
12	Radiated Disturbance Immunity.....	16
12.1	Instruments Used.....	16
12.2	Test Procedure.....	17
12.3	Environmental Conditions.....	17
12.4	Results.....	17
12.5	Photos of the Test Assembly.....	18

Not valid as a compliance certificate.
This report can only be reproduced in its entirety.

13	Immunity to Conducted RF Disturbances in Telecommunications and Electric Power Terminals	18
13.1	Instruments Used	18
13.2	Test Procedure	19
13.3	Environmental Conditions	19
13.4	Results	19
13.5	Photos of the Test Assembly	20
14	Immunity to Electrical Fast Transient/Burst in Telecommunications and Electric Power Terminals	20
14.1	Instruments Used	20
14.2	Test Procedure	21
14.3	Environmental Conditions	21
14.4	Results	21
14.5	Photos of the Test Assembly	21
15	Immunity to Electrostatic Discharges	22
15.1	Instruments Used	22
15.2	Test Procedure	22
15.3	Environmental Conditions	22
15.4	Results	22
16	Surge Immunity in Electric Power Terminals	23
16.1	Instruments Used	23
16.2	Test Procedure	24
16.3	Environmental Conditions	24
16.4	Results	24
16.5	Photos of the Test Assembly	24
17	Immunity to Magnetic Fields	25
17.1	Instruments Used	25
17.2	Test Procedure	25
17.3	Environmental Conditions	25
17.4	Results	25
17.5	Photos of the Test Assembly	26
18	Immunity Test Measurement Uncertainty	26
19	Comments	26
20	Document Issues	26
21	Execution and Approval	27


Not valid as a compliance certificate.
This report can only be reproduced in its entirety.

1 Scope

The objective of this report is to present electromagnetic compatibility tests on the equipment identified in Item 2, based on the regulations presented in Section 5 of this report.

2 Identification of Equipment Under Test

The equipment is showed in photos 1 to 8:

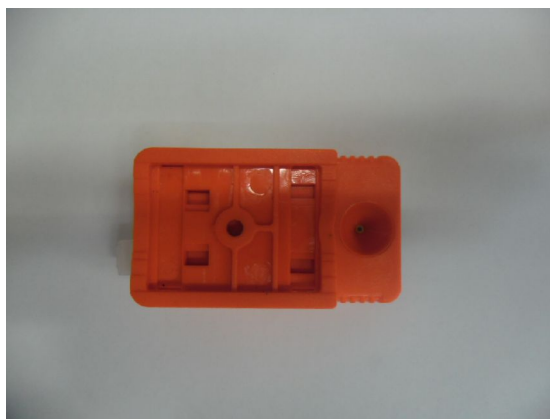

Photos 1 and 2 Equipment Under Test (EUT) – Sample 5252




Photos 3 and 4 Equipment Under Test (EUT) – Sample 5252

Not valid as a compliance certificate.
This report can only be reproduced in its entirety.



Photos 5 and 6 Equipment Under Test (EUT) – Sample 5252

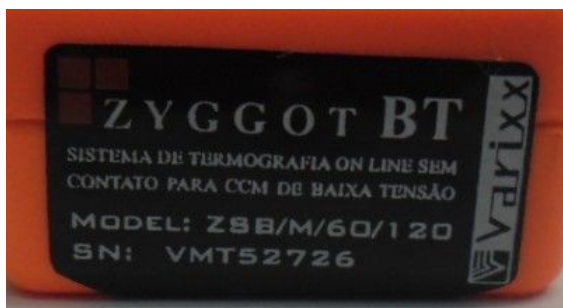

Photos 7 and 8 Equipment Under Test (EUT) – Sample 5252

2.1 Changes made to the sample during tests

No changes were made to the samples under test.

3 General Information

Received on	Samples	Tests start date	Tests end date
03/Nov/11	5252	07/Nov/11	10/Nov/11

4 Technical Documentation Provided

No technical documentation was provided.

Not valid as a compliance certificate.
This report can only be reproduced in its entirety.

5 Test Methods and References

- a) CISPR 11 (2010 – Ed. 5.1) – Industrial, scientific and medical equipment – Radio-Frequency disturbance characteristics – Limits and methods of measurement.
- b) IEC 61000-4-2 (2001) – Electromagnetic Compatibility (EMC) – Part 4: Testing and Measurement Techniques. Section 2: Electrostatic discharge immunity test.
- c) IEC 61000-4-3 (2008) – Electromagnetic Compatibility (EMC) – Part 4: Testing and Measurement Techniques. Section 3: Radiated electromagnetic field requirements.
- d) IEC 61000-4-4 (2004) – Electromagnetic Compatibility (EMC) – Part 4: Testing and Measurement Techniques. Section 4: Electrical fast transient.
- e) IEC 61000-4-5 (2005) – Electromagnetic Compatibility (EMC) – Part 4: Test and Measurement Techniques. Section 5: Surge immunity test.
- f) IEC 61000-4-6 (2006) – Electromagnetic Compatibility (EMC) – Part 4: Testing and Measurement Techniques. Section 6: Immunity to conducted disturbances induced by radio-frequency fields.
- g) IEC 61000-4-8 (2001) – Electromagnetic Compatibility (EMC) – Part 4: Testing and Measurement Techniques. Section 8: Power frequency magnetic field immunity test.

6 Test Laboratory

CPqD – Centro de Pesquisa e Desenvolvimento em Telecomunicações

Rod. Campinas-Mogi-Mirim, km 118,5 – SP340 PO Box 6070

13086-902 – Campinas – SP – Brazil

Laboratory and Network Infrastructure Corporate Department

Network Infrastructure Solutions Department

Electromagnetic Compatibility Area

Victor Vellano Neto

email: vellano@cpqd.com.br

Phone: + 55 (19) 3705-7097

Fax: + 55 (19) 3705-6699

Not valid as a compliance certificate.
This report can only be reproduced in its entirety.

7 Summary of the Tests Performed

Test	Reference document	Specification	Configuration	Sample
Radiated Emission	CISPR 11 (2010)	Group 1 Class A	Default	Sample 5252
Conducted Emission in Electric Power Terminals	CISPR 11 (2010)	Group 1 Class A	Default	Sample 5252
Radiated Disturbance Immunity	IEC 61000-4-3 (2008)	10 V/m, from 80 MHz to 6 GHz	Default	Sample 5252
Immunity to Conducted RF Disturbances in Telecommunications and Electric Power Terminals	IEC 61000-4-6 (2006)	10 V from 150 kHz to 80 MHz	Default	Sample 5252
Immunity to Electrical Fast Transient/Burst in Telecommunications and Electric Power Terminals	IEC 61000-4-4 (2004)	Telecommunications: 2 kV Electric Power: 2 kV	Default	Sample 5252
Immunity to Electrostatic Discharges	IEC 61000-4-2 (2001)	6 kV for contact discharge 8 kV for air discharge	Default	Sample 5252
Surge Immunity in Electric Power Terminals	IEC 61000-4-5 (2005)	Electric Power a.c.: 1 kV line-to-line 2 kV line-to-ground	Default	Sample 5252
Immunity to Magnetic Fields	IEC 61000-4-8 (2001)	Severity 4	Default	Sample 5252

8 Terminology

The following terms and definitions are used in this document:

AE – Auxiliary Equipment

EUT – Equipment Under Test

LISN – Line Impedance Stabilization Network

EMC – Electromagnetic Compatibility

EMI – Electromagnetic Interference

ESD – Electrostatic Discharge

DC – Direct Current

9 EUT Operating Conditions

During the tests, the equipment was set up in typical conditions, this procedure is the responsibility of the manufacturer:

Configuration (default)

Not valid as a compliance certificate.
This report can only be reproduced in its entirety.

Tests were run on equipment under typical use conditions. The converter-relay + Source VPS12024 was used to constantly monitor its correct operation. Figure 1 illustrates the configuration.

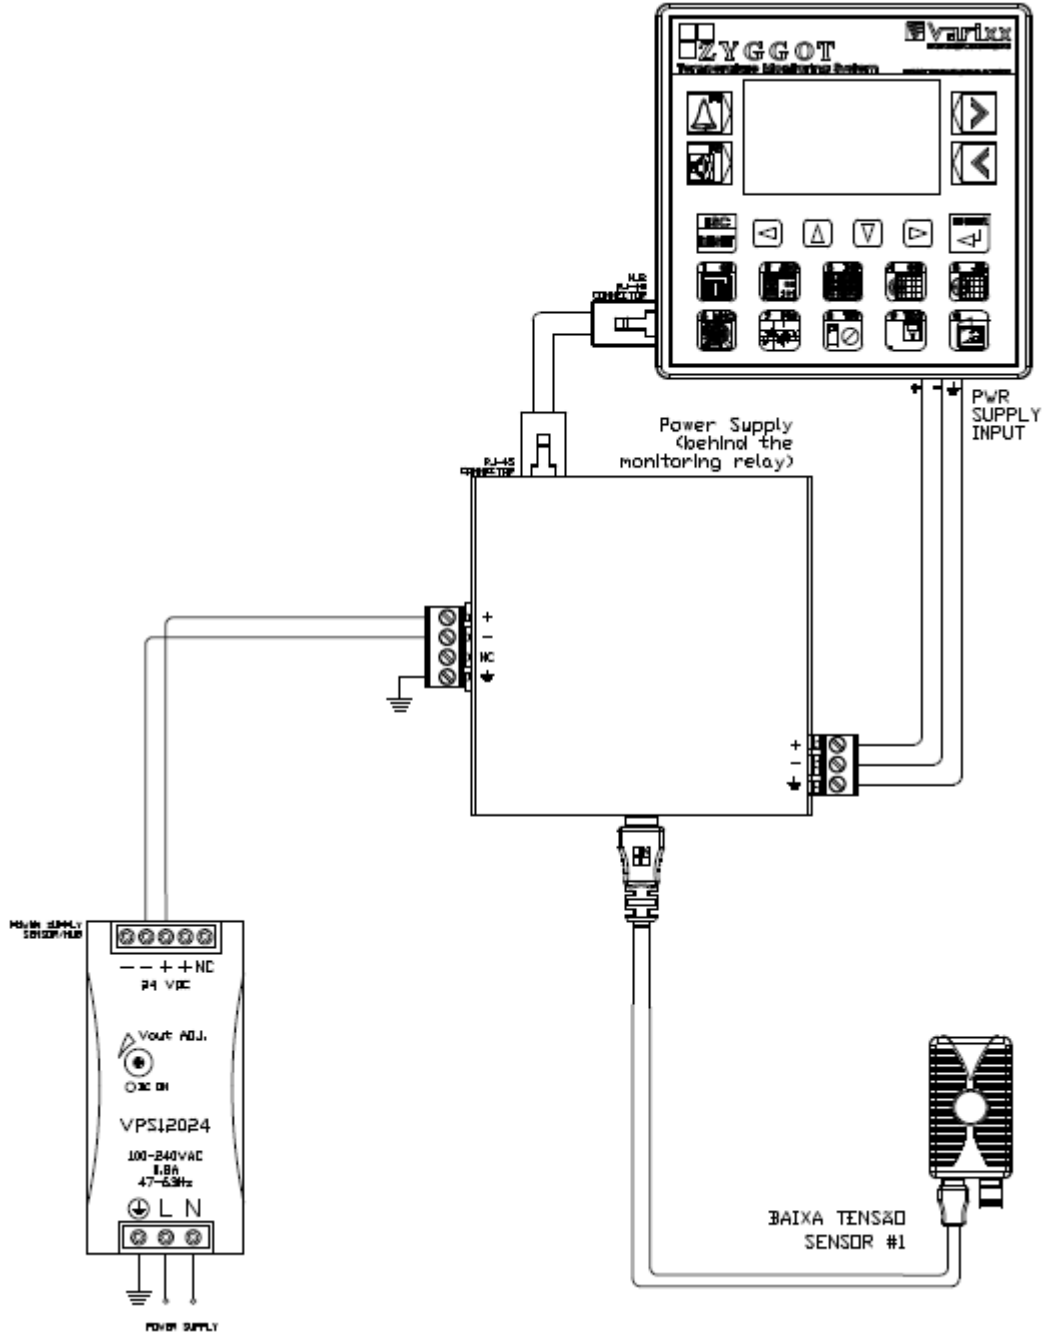


Figure 1 Configuration (default)

Not valid as a compliance certificate.
This report can only be reproduced in its entirety.

Table 1 List of auxiliary equipment used with the EUT operation

Equipment	Manufacturer	Model	Identification	Owner	Validity of calibration/verification – Traceability
Source	Varixx	VPS 12024	S/N VMT54895	Varixx	Calibration not required
Relay	Varixx	VZX/B1/U	S/N 33265	Varixx	Calibration not required
Converter	Varixx	ZXT-2	S/N VMT33393	Varixx	Calibration not required

10 Radiated Emission

10.1 Instruments Used

Table 2 List of equipment used in the Radiated Emission Test

Equipment	Manufacturer	Model	Identification	Validity of calibration/verification – Traceability
SEMI-ANECHOIC CHAMBER	ETS	3m	CSA pr-12	Site Attenuation: July 2014 – CPqD
EMI TEST RECEIVER	R&S	ESI26	S/N 835336/007	December 2011 – CPqD
RELAY SWITCH UNIT	R&S	331.1601.31	S/N 338969/001	Calibration not required
MULTI-DEVICE CONTROLLER	ETS	2090	S/N 0005-1517	Calibration not required
MICROCOMPUTER	COMPAQ	PENTIUM III	—	Calibration not required
ELECTRIC TURNABLE SYSTEM	ETS	2087	—	Calibration not required
MINI MAST	ETS	2075	—	Calibration not required
BICONILOG ANTENNA	ETS	3142B	RCE000854	February 2012 – ETS

10.2 Test Procedure

Measurement procedures comply with the CISPR11 standard. Quasi-peak values for radiated field were used as reference. The product was classified as a Class A / Group 1 equipment. EUT assembly and operation followed the procedures established in CISPR11 as described in Section 9.

10.3 Environmental Conditions

All tests were performed in a controlled environment as specified in the documents listed in Section 5.

Not valid as a compliance certificate.
This report can only be reproduced in its entirety.

Temperature	Initial: 22.1 °C	Relative air humidity	Initial: 53.1 %
	Final: 22.3 °C		Final: 53.1 %

10.4 Results


Note: Changes in the sample, if applicable, will be described in Section 2.1. Changes are designated by the sample number followed by the word “modified” and a number (in sequence). The customer is responsible for all changes.

Table 3 Radiated Emission Test Results

Graph 1 – Radiated Emission Test Results – Default Configuration - Power Supply 220V @ 60 Hz – Sample 5252						
Quasi-Peak Values						
Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Azimuth (°)	Polarization
223.98	41.8	50.0	8,2	127	268	HORIZONTAL
496.02	51.0	57.0	6	100	112	VERTICAL

Legend
 Frequency: Tuned frequency
 Level: Level measured (corresponding factors applied) through a quasi-peak detector.
 Limit: Quasi-peak limit set by the corresponding standard (CISPR11) and correction factor applied for the 3 m distance ([10 m Limit] + 20 * Log [10 m/3 m]).
 Margin: Difference between the corresponding limit and the level measured (**positive: does not exceed the limit/negative: exceeds the limit**).
 Height: the height of the receiving antenna
 Azimuth: the angle of the rotating base
 Polarization: the polarization of the receiving antenna


Not valid as a compliance certificate.
This report can only be reproduced in its entirety.

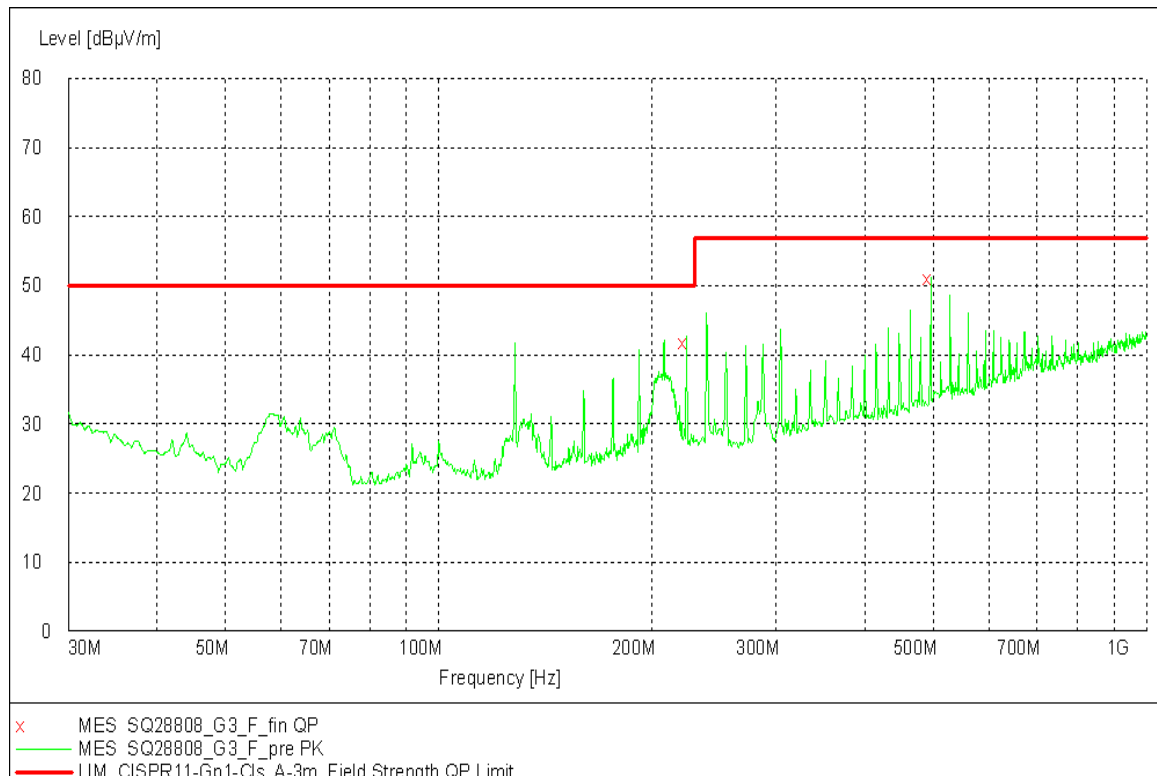

Graph 1 Radiated Emission Test Results – Default Configuration – Power Supply 220V @ 60 Hz (24 Vdc output) – Sample 5252

Note: Preliminary tests were run using the product power supply and a complete test was conducted at the higher emission level. Graph 2 shows the preview.

Not valid as a compliance certificate.
 This report can only be reproduced in its entirety.

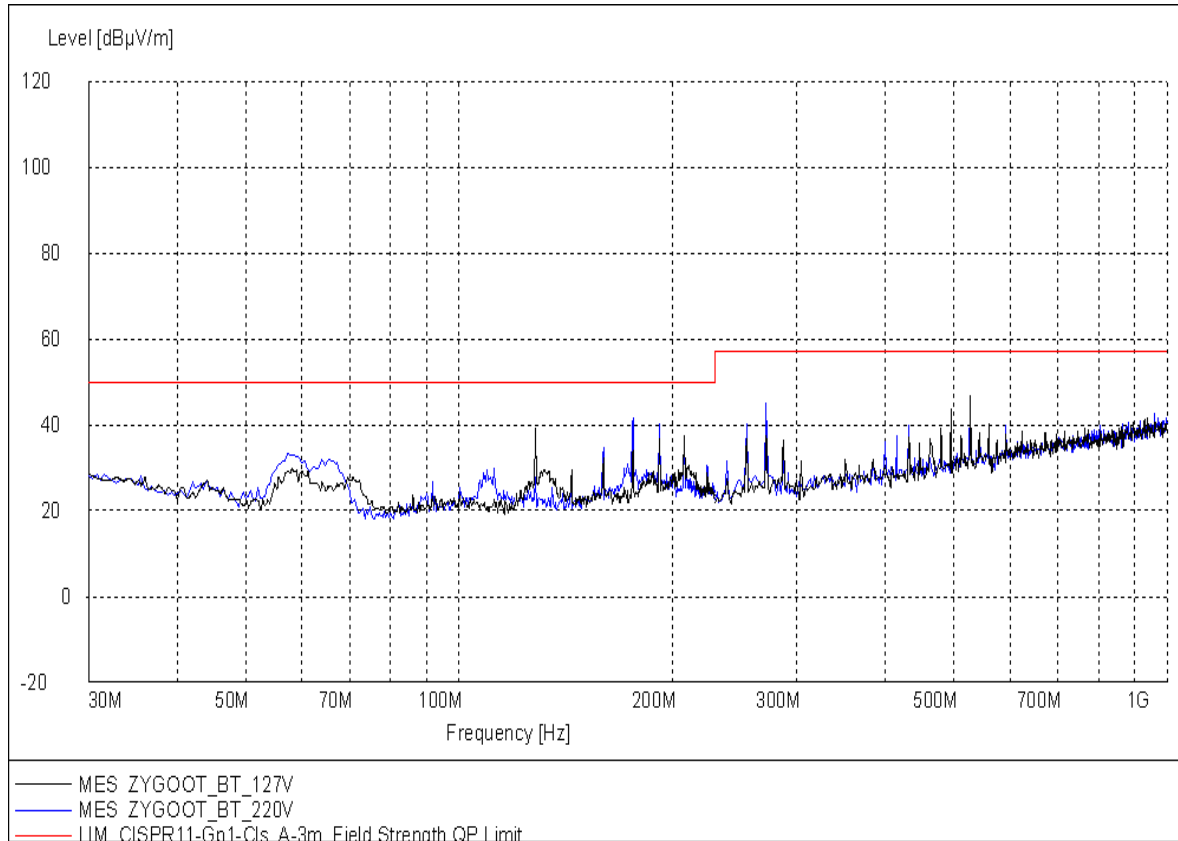

Graph 2 Radiated Emission Preliminary Test Results – Default Configuration – Power Supply 127V @ 60 Hz / 220V @ 60 Hz – Sample 5252

10.4.1 Measurement Uncertainty



The following table shows the strength measurement uncertainty values of the electromagnetic field.

Test	Quantity	Uncertainty	k	Confidence level
Radiated Emission	Electric field strength	±4.960 dB	2	95%

According to Section 12.5 of CISPR11 (Edition 5.1 – 2010), assessment of compliance with the standard will be based on the measurement results, without taking into account uncertainties.

Not valid as a compliance certificate.
This report can only be reproduced in its entirety.

10.5 Photos of the Test Assembly

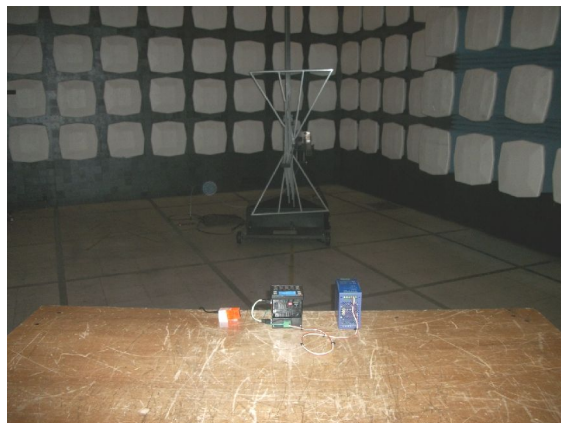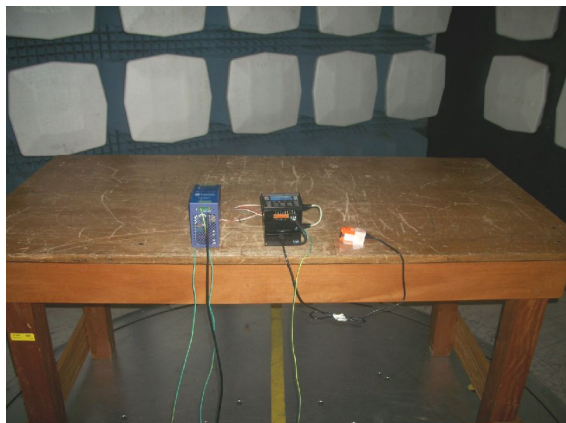

Photos 9 and 10 - Radiated emission

11 Conducted Emission in Electric Power Terminals

11.1 Instruments Used

Table 4 List of equipment used in the Conducted Emission Test

Equipment	Manufacturer	Model	Identification	Validity of calibration/verification – Traceability
SEMI-ANECHOIC CHAMBER	ETS	3m	CSA pr-12	Site Attenuation: July 2014 – CPqD
EMI TEST RECEIVER	R&S	ESI26	S/N 835336/007	December 2011 – CPqD
RELAY SWITCH UNIT	R&S	331.1601.31	S/N 338969/001	Calibration not required
MICROCOMPUTER	COMPAQ	PENTIUM III	—	Calibration not required
HIGH-PASS FILTER	Rohde & Schwarz	EZ-25	RCE001230	June 2012 – CPqD
LISN	R&S	ESH3-Z5	CPqD 020398	June 2012 – CPqD

11.2 Test Procedure

Measurement procedures comply with the CISPR11 standard. Quasi-peak and average values for disturbance voltage were used. The product was classified as a Class A / Group 1 equipment. EUT assembly and operation followed the procedures established in CISPR11 as described in Section 9.

Not valid as a compliance certificate.
This report can only be reproduced in its entirety.

11.3 Environmental Conditions

All tests were performed in a controlled environment as specified in the documents listed in Section 5.

Temperature	Initial: 20.5 °C	Relative air humidity	Initial: 53.6 %
	Final: 20.3 °C		Final: 53.7 %

11.4 Results


Note: Changes in the sample, if applicable, will be described in Section 2.1. Changes are designated by the sample number followed by the word “modified” and a number (in sequence). The customer is responsible for all changes.

Table 5 Conducted Emission in Electric Power Terminals Test Results

Graph 3 – Conducted Emission in Electric Power Terminals Test Results – Default Configuration – Power Supply 24Vdc – Sample 5252			
Average Values			
Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)
0,1500	61,2	66,0	4,8
0,3250	54,4	66,0	11,6
0,5050	46,7	60,0	13,3
0,9100	41,0	60,0	19,0
12,2850	25,9	60,0	34,1
16,0950	24,9	60,0	35,1
Quasi-peak Values			
Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)
0,1500	63,3	79,0	15,7
0,3250	57,1	79,0	21,9
0,5050	49,5	73,0	23,5
0,9100	44,0	73,0	29,0
12,3850	39,3	73,0	33,7
16,2200	39,9	73,0	33,1

Legend
 Frequency: Frequency measured
 Level: Level measured (corresponding factors applied) through quasi-peak and average detectors.
 Limit: Quasi-peak limit set according to the corresponding standard (CISPR11).
 Margin: Difference between the corresponding limit and the level measured (**positive: does not exceed the limit/negative: exceeds the limit**).

Not valid as a compliance certificate.
This report can only be reproduced in its entirety.

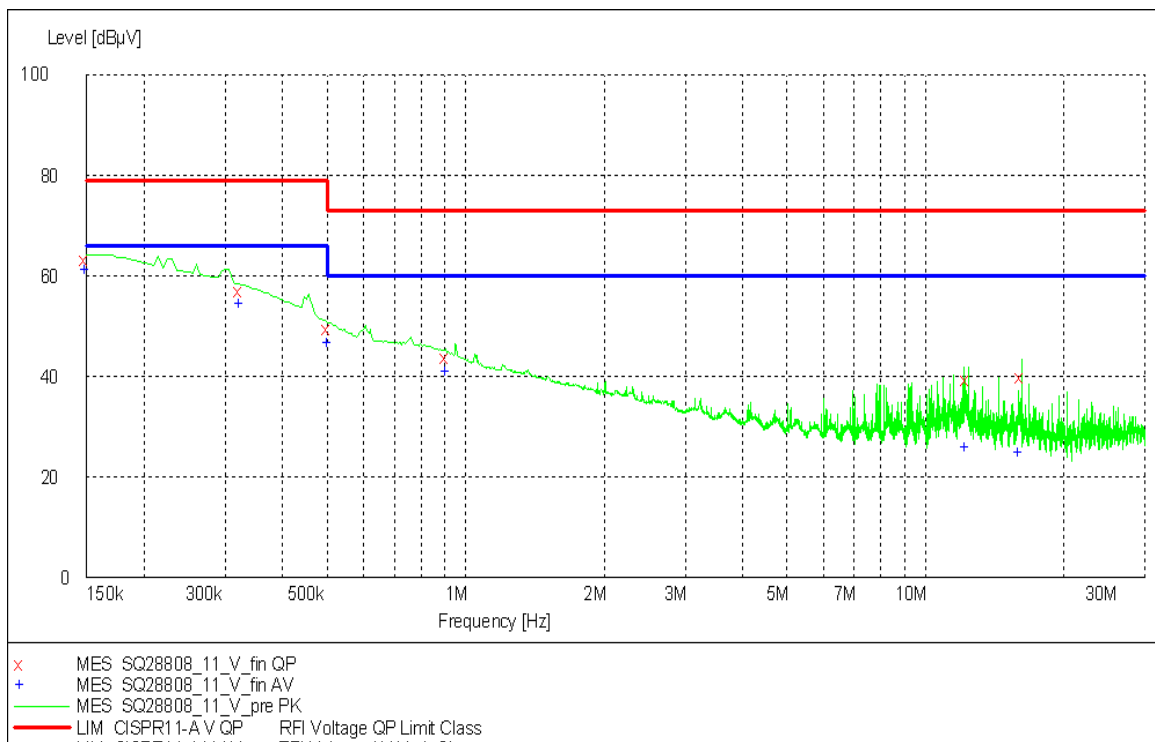

Graph 3 Conducted Emission in Electric Power Terminals Test Results – Default Configuration – Power Supply 24Vdc – Sample 5252

11.4.1 Measurement Uncertainty

The following table shows the values of the Conducted RF Voltage measurement uncertainty.

Test	Quantity	Uncertainty	k	Confidence level
Conducted Emission	Conducted Voltage Level	±3.4860 dB	2	95%

According to Section 12.5 of CISPR11 (Edition 5.1 – 2010), assessment of compliance with the standard will be based on the measurement results, without taking into account uncertainties.

Not valid as a compliance certificate.
This report can only be reproduced in its entirety.

11.5 Photos of the Test Assembly



Photos 11 and 12 - Conducted emission

12 Radiated Disturbance Immunity

12.1 Instruments Used

Table 6 List of equipment used in the Radiated Disturbance Immunity Test

Equipment	Manufacturer	Model	Identification	Validity of calibration/verification – Traceability
SEMI-ANECHOIC CHAMBER	ETS	SpaceSaver 26H – Part Number ETS SS26H	CSA pr-T3	Field uniformity adjustment: April 2012 – CPqD
SIGNAL GENERATOR	R&S	SMB100A	S/N 1406.6000.02	April 2014 – PD.SM.11.22A.2286A/CC-03-AA
USB ADAPTER FOR NRP-Z	R&S	NRP-Z4	S/N 1146.8001.02	N/A
AVERAGE POWER SENSOR	R&S	NRP-Z91	CPqD036865	April 2013 – PD.SM.11.22A.2285A/CC-03-AA
OPEN SWITCH AND CONTROL PLATFORM OSP	R&S	OSP 120	1505300902	N/A
AMPLIFIER 80 MHz – 1GHz	Bonn	BLW0810-250/100	087036B	N/A
DUAL AMPLIFIER 0.8 – 2.5 GHz / 2.5 – 6 GHz	Bonn	BLW0860-75/50D	087098	N/A
ULTRALOG ANTENNA	R&S	HL562	100425	N/A

Not valid as a compliance certificate.
This report can only be reproduced in its entirety.

Equipment	Manufacturer	Model	Identification	Validity of calibration/verification – Traceability
BROADBAND HORN ANTENNA	SB	BBHA9120E	387	N/A
STACKED LOG-PER ANTENNA	SB	STLP9149	24	N/A
SYSTEM SOFTWARE	R&S	EMC32-S	N/A	N/A
DELL PC	DELL	Optiplex 755	CPqD03570407	N/A
19 INCH RACK	R&S	TS-SEMS	N/A	N/A
TRIPOD	R&S	HL562Z1	100157	N/A

12.2 Test Procedure

Procedures comply with the IEC 61000-4-3 standard, with a 10 V/m severity level range varying from 80 MHz to 1 GHz and from 1 GHz to 3 GHz.

12.3 Environmental Conditions

All tests were performed in a controlled environment as specified in the documents listed in Section 5.

Temperature	Initial: 19.8 °C	Relative air humidity	Initial: 48.3 %
	Final: 19.5 °C		Final: 50.3 %

12.4 Results

Note: Changes in the sample, if applicable, will be described in Section 2.1. Changes are designated by the sample number followed by the word “modified” and a number (in sequence). The customer is responsible for all changes.


Table 7 Radiated Disturbance Immunity Test Results

Default Configuration – Sample 5252			
Frequency Range: 80 MHz to 1 GHz			
Vertical Polarization		Horizontal Polarization	
EUT side	Note	EUT side	Note
Front side (LVF)	Nothing on record	Front side (LVF)	Nothing on record
Frequency Range: 1 GHz to 3GHz			
Vertical Polarization		Horizontal Polarization	
EUT side	Note	EUT side	Note
Front side (HVF)	Nothing on record	Front side (HVF)	Nothing on record

Based on the performance criteria established in the IEC 61000-4-3 standard, the EUT performance was monitored while applying the disturbance and no difference was detected when comparing both with and without disturbance operation modes.

Not valid as a compliance certificate.
This report can only be reproduced in its entirety.

12.5 Photos of the Test Assembly

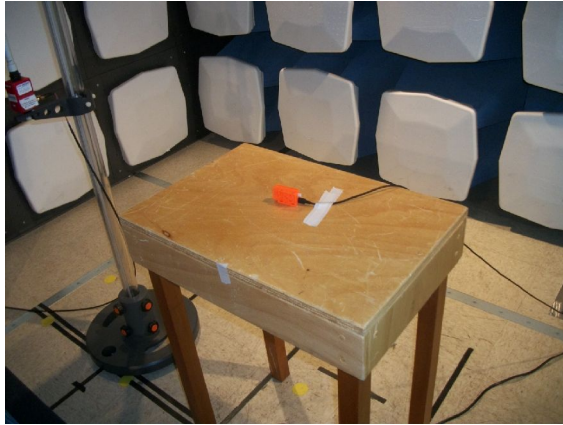

Photos 13 and 14 - Radiated Disturbance Immunity

13 Immunity to Conducted RF Disturbances in Telecommunications and Electric Power Terminals

13.1 Instruments Used

Table 8 List of equipment used in the Immunity to Conducted RF Test

Equipment	Manufacturer	Model	Identification	Validity of calibration/verification – Traceability
SEMI-ANECHOIC CHAMBER	ETS	SpaceSaver 26H – Part Number ETS SS26H	CSA pr-T3	N/A
SIGNAL GENERATOR	R&S	SMB100A	S/N 1406.6000.02	April 2014 – PD.SM.11.22A.2286A/CC-03-AA
USB ADAPTER FOR NRP-Z	R&S	NRP-Z4	S/N 1146.8001.02	N/A
AVERAGE POWER SENSOR	R&S	NRP-Z91	CPqD036865	April 2013 – PD.SM.11.22A.2285A/CC-03-AA
OPEN SWITCH AND CONTROL PLATFORM OSP	R&S	OSP 120	1505300902	N/A
AMPLIFIER	AMPLIFIER RESEARCH	150A100B	CPqD 035440	Not required
SYSTEM SOFTWARE	R&S	EMC32-S	N/A	N/A

Not valid as a compliance certificate.
This report can only be reproduced in its entirety.

Equipment	Manufacturer	Model	Identification	Validity of calibration/verification – Traceability
DELL PC	DELL	Optiplex 755	CPqD03570407	N/A
19 INCH RACK	R&S	TS-SEMS	N/A	N/A
6 dB ATTENUATOR 6 dB - DC of 2 GHz / 100 W 50 Ohms	ROHDE&SCHWARZ	RBU100 1073.8495.0 6	RCE000984	April 2012 – CPqD
20 dB ATTENUATOR	JFW	766- 2050FHC- 020-20 20DB	SN2687A (RCE000850)	June 2012 – CPqD
CDN	EM TEST	M2/M3	SN0708-38	Voltage adjustment: July 2012 – CPqD
EMCLAMP	LUTHI	EM101	CPqD 008514	Voltage adjustment: February 2012 – CPqD

13.2 Test Procedure

Procedures comply with the IEC 61000-4-6 standard, with a 10 V severity level range varying from 0.15 MHz to 80 MHz.

13.3 Environmental Conditions

All tests were performed in a controlled environment as specified in the documents listed in Section 5.

Temperature	Initial: 19.1 °C	Relative air humidity	Initial: 51.1 %
	Final: 18.7 °C		Final: 53.4 %

13.4 Results

Note: Changes in the sample, if applicable, will be described in Section 2.1. Changes are designated by the sample number followed by the word “modified” and a number (in sequence). The customer is responsible for all changes.


Not valid as a compliance certificate.
This report can only be reproduced in its entirety.

Table 9 Immunity to Conducted RF Test Results

<i>Coupling</i>	<i>Sample 5252 Configuration/Interface</i>	<i>Note</i>
CDN M2/M3	Default / Power Supply	Nothing on record
EMCLAMP EM101	Default / Communication	Nothing on record

Based on the performance criteria established in the IEC 61000-4-6 standard, the EUT performance was monitored while applying the disturbance and no difference was detected when comparing both with and without disturbance operation modes.

13.5 Photos of the Test Assembly

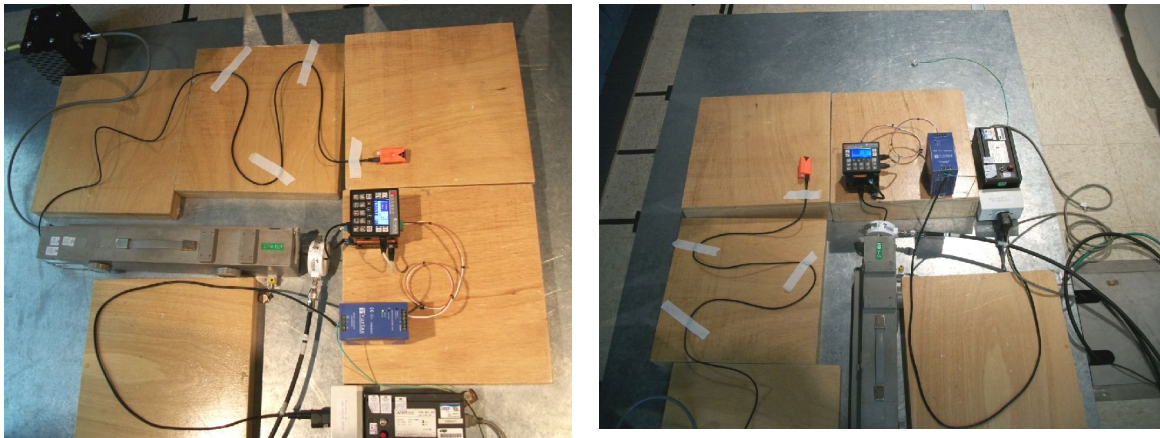

Photos 15 and 16 - Immunity to Conducted RF

14 Immunity to Electrical Fast Transient/Burst in Telecommunications and Electric Power Terminals

14.1 Instruments Used

Table 10 List of equipment used in the Immunity to Electrical Fast Transients/Burst Test

Equipment	Manufacturer	Model	Identification	Validity of calibration/verification – Traceability
SHIELDED CHAMBER	CPqD	—	CB pr-12	Calibration not required
TRANSIENTS GENERATOR	EM TEST	UCS 500 M4	CPqD 035569	October 2012 – CPqD
THREE-PHASE CDN	EM TEST	CNI 503 A2	SN V0812103558	October 2012 – CPqD
CAPACITIVE CLAMP	EM TEST	—	s/n 304613	Calibration not required

Not valid as a compliance certificate.
This report can only be reproduced in its entirety.

14.2 Test Procedure

Procedures comply with the IEC 61000-4-4 standard, with 2 kV severity level for electric power terminals and 2 kV for telecommunications terminals.

14.3 Environmental Conditions

All tests were performed in a controlled environment as specified in the documents listed in Section 5.

Temperature	Initial: 25.2 °C	Relative air humidity	Initial: 51.3 %
	Final: 25.3 °C		Final: 51.1 %

14.4 Results

Note: Changes in the sample, if applicable, will be described in Section 2.1. Changes are designated by the sample number followed by the word “modified” and a number (in sequence). The customer is responsible for all changes.

Table 11 Immunity to Electrical Fast Transient/Burst Test Results

<i>Coupling</i>	<i>Sample 5252 Configuration / Cable</i>	<i>Note</i>
L+N @ ± 2 kV / 5 kHz	Default / Power Supply	Nothing on record
CCP @ ± 2kV / 5 kHz	Default / Communication	Nothing on record

Notes:
CCP = Capacitive Coupling Clamp.

Based on the performance criteria established in the IEC 61000-4-4 standard, the EUT performance was monitored while applying the disturbance and no difference was detected when comparing both with and without disturbance operation modes.

14.5 Photos of the Test Assembly



Photos 17 and 18 - Immunity to Electrical Fast Transient/Burst

Not valid as a compliance certificate.
This report can only be reproduced in its entirety.

15 Immunity to Electrostatic Discharges

15.1 Instruments Used

Table 12 List of equipment used in the Immunity to Electrostatic Discharge Test

Equipment	Manufacturer	Model	Identification	Validity of calibration/verification – Traceability
SHIELDED CHAMBER	CPqD	—	CB pr-12	Calibration not required
ESD SIMULATOR	EM TEST	ESD 30 C	SNV0812103563	January 2012 – CPqD

15.2 Test Procedure

Procedures comply with the IEC 61000-4-2 standard, and severity levels are 6 kV for contact discharge and 8 kV for air discharge.

15.3 Environmental Conditions

All tests were performed in a controlled environment as specified in the documents listed in Section 5.

Temperature	Initial: 23.2 °C	Relative air humidity	Initial: 52.5 %
	Final: 23.2°C		Final: 51.9 %

15.4 Results

Note: Changes in the sample, if applicable, will be described in Section 2.1. Changes are designated by the sample number followed by the word “modified” and a number (in sequence). The customer is responsible for all changes.

Table 13 Immunity to Electrostatic Discharge Test Results

Default Configuration – Sample 5252			
HCP – Horizontal Coupling Plane			
EUT side	Photo	10 discharges of +6 kV	10 discharges of -6 kV
		Note	Note
Front side	Photo 19	Nothing on record	Nothing on record
Right side	Photo 20	Nothing on record	Nothing on record
Rear side	Photo 21	Nothing on record	Nothing on record
Left side	Photo 22	Nothing on record	Nothing on record
VCP – Vertical Coupling Plane			
EUT side	Photo	10 discharges of +6 kV	10 discharges of -6 kV
		Note	Note
Left side	Photo 19	Nothing on record	Nothing on record
Front side	Photo 20	Nothing on record	Nothing on record
Right side	Photo 21	Nothing on record	Nothing on record
Rear side	Photo 22	Nothing on record	Nothing on record
Air Discharge (applied only on non-conductive parts)			
<i>There are no discharge flow points through the air.</i>			
Direct Contact Discharge (applied only on conductive parts)			
<i>There are no discharge flow points through contact.</i>			
Based on the performance criteria established in the IEC 61000-4-2 standard, the EUT performance was monitored while applying the disturbance and no difference was detected in the EUT performance when comparing both with and without disturbance operation modes.			

Not valid as a compliance certificate.
This report can only be reproduced in its entirety.



Photo 19 Horizontal front view and vertical left view of EUT

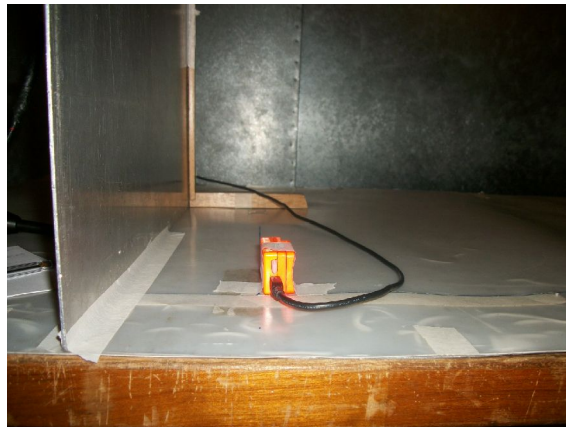


Photo 20 Horizontal right view and vertical front view of EUT

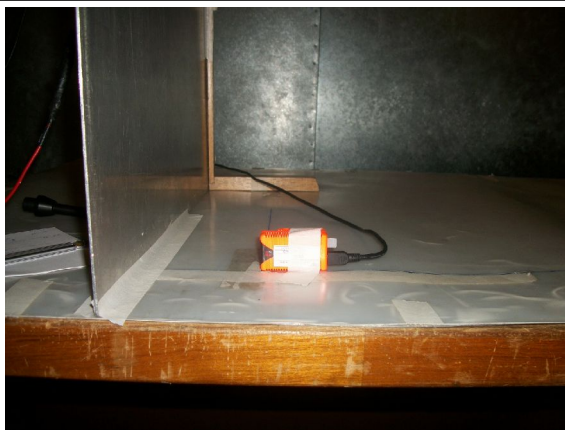


Photo 21 Horizontal rear view and vertical right view of EUT

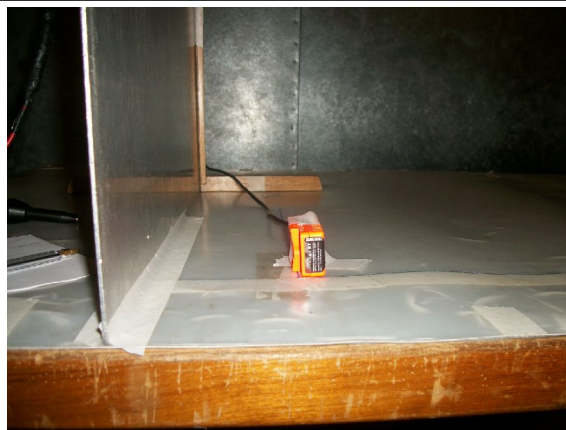


Photo 22 Horizontal left view and vertical rear view of EUT

16 Surge Immunity in Electric Power Terminals

16.1 Instruments Used

Table 14 List of equipment used in the Surge Immunity Test

Equipment	Manufacturer	Model	Identification	Validity of calibration/verification – Traceability
SHIELDED CHAMBER	CPqD	—	CB pr-12	Calibration not required
TRANSIENTS GENERATOR	EM TEST	UCS 500 M4	CPqD 035569	October 2012 – CPqD
THREE-PHASE CDN	EM TEST	CNI 503 A2	SN V0812103558	October 2012 – CPqD

Not valid as a compliance certificate.
This report can only be reproduced in its entirety.

16.2 Test Procedure

Procedures comply with the IEC 61000-4-5 standard, with 2 kV severity level line-to-ground, and 1 kV line-to-line, for electric power terminals.

16.3 Environmental Conditions

All tests were performed in a controlled environment as specified in the documents listed in Section 5.

Temperature	Initial: 23.8 °C	Relative air humidity	Initial: 44.5 %
	Final: 24.4 °C		Final: 44.2 %

16.4 Results


Note: Changes in the sample, if applicable, will be described in Section 2.1. Changes are designated by the sample number followed by the word “modified” and a number (in sequence). The customer is responsible for all changes.

Table 15 Surge Immunity Test Results

<i>Coupling</i>	<i>Sample 5252 Configuration / Cable</i>	<i>Note</i>
L1-PE @ ± 2kV/1,2/50µs	Default / Power Supply	Nothing on record
N-PE @ ± 2kV/1,2/50µs	Default / Power Supply	Nothing on record
L1-N @ ± 1kV/1,2/50µs	Default / Power Supply	Nothing on record

Based on the performance criteria established in the IEC 61000-4-5 standard, the EUT performance was monitored while applying the disturbance and no difference was detected when comparing both with and without disturbance operation modes.

16.5 Photos of the Test Assembly

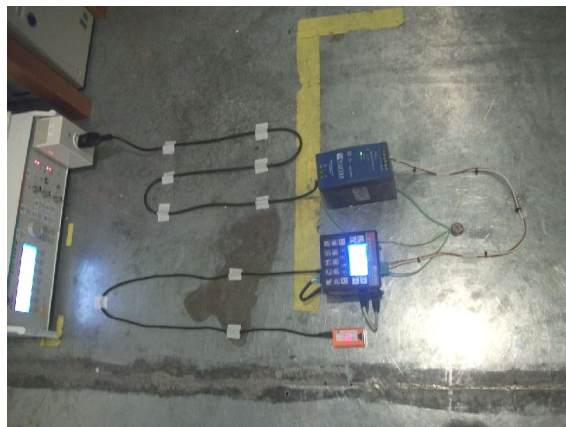

Photos 23 and 24 - Surge Immunity

Not valid as a compliance certificate.
This report can only be reproduced in its entirety.

17 Immunity to Magnetic Fields

17.1 Instruments Used

Table 16 List of equipment used in the Immunity to Magnetic Fields Test

Equipment	Manufacturer	Model	Identification	Validity of calibration/verification – Traceability
SHIELDED CHAMBER	CPqD	—	CB pr-12	Calibration not required
TRANSIENTS GENERATOR	EM TEST	UCS 500 M4	CPqD 035569	October 2012 – CPqD
VARIAC	EM TEST	MV 2616	SN V0812103559	October 2012 – CPqD
THREE-PHASE CDN	EM TEST	CNI 503 A2	SN V0812103558	October 2012 – CPqD
ANTENNA	EM TEST	MS100	SN 0308-19	October 2012 – CPqD
TRAFO	EM TEST	MS2630	—	October 2012 – CPqD
TRAFO	EM TEST	MS26100	SN 1207-21	October 2012 – CPqD

17.2 Test Procedure

Procedures comply with the IEC 61000-4-8 standard and the severity levels indicated next:

Level	Continuous Mode		Short Duration	
	Intensity (A/m)	Duration (min)	Intensity (A/m)	Duration (seconds)
4	30	10	Not applicable	Not applicable

17.3 Environmental Conditions

All tests were performed in a controlled environment as specified in the documents listed in Section 5.

Temperature	Initial: 23.5 °C	Relative air humidity	Initial: 44.9 %
	Final: 23.7 °C		Final: 45.1 %

17.4 Results

Note: Changes in the sample, if applicable, will be described in Section 2.1. Changes are designated by the sample number followed by the word “modified” and a number (in sequence). The customer is responsible for all changes.

Not valid as a compliance certificate.
This report can only be reproduced in its entirety.

Table 17 Voltage Dips, Short Interruptions and Voltage Variations Immunity Tests

Severity	Mode	Sample 5252 Configuration / Nominal Voltage	Note
4	Continuous Horizontal	Default / 127 Vac @ 60Hz	Nothing on record
4	Continuous Vertical	Default / 127 Vac @ 60Hz	Nothing on record

Based on the performance criteria established in the IEC 61000-4-8 standard, the EUT performance was checked during the test, and no difference was detected when comparing both with and without disturbance operation modes.

17.5 Photos of the Test Assembly



Photos 25 and 26 - Immunity to Magnetic Fields

18 Immunity Test Measurement Uncertainty

In the immunity tests, the measurement uncertainty of the test method is not applicable. The uncertainty, in such cases, is related to the calibration of disturbance generators. CPqD makes sure calibration uncertainty of all instruments used during the tests is registered and updated. If necessary, the customer can formally request such record.

19 Comments

The test results refer only to the sample described in this report.

20 Document Issues

Issue date	Version Number	Description of changes
25/Nov/11	AA	First version

Not valid as a compliance certificate.
This report can only be reproduced in its entirety.

21 Execution and Approval

Executed by:

Paulo Henrique Sigris
Givanildo Pereira de Paula
Diego Jordani Soares

Approved by:

This document was digitally signed by:
Carlos Eric de Souza Ferraz
Laboratory Technician
Network Infrastructure Solutions Department

Date of issue: 25/Nov/11

Not valid as a compliance certificate.
This report can only be reproduced in its entirety.